


# LUCID SERIES

THINK RF THINK LUCID

## BENCHTOP MODELS

The all-new Lucid Series benchtop platform offers up to 4 phase coherent channels in a standalone compact unit. The series feature 3, 6 and 12 GHz models in single, dual or four channel versions, all sharing the very same industry leading highlighted features. Featuring extremely fast switching speed, superior signal integrity and purity, removable memory card for maximum security, all the necessary modulated signals for analog communication systems, built in LAN and USB interfaces, the Lucid Series is designed to meet today's most demanding specifications, needed from the R&D benches to the production lines.

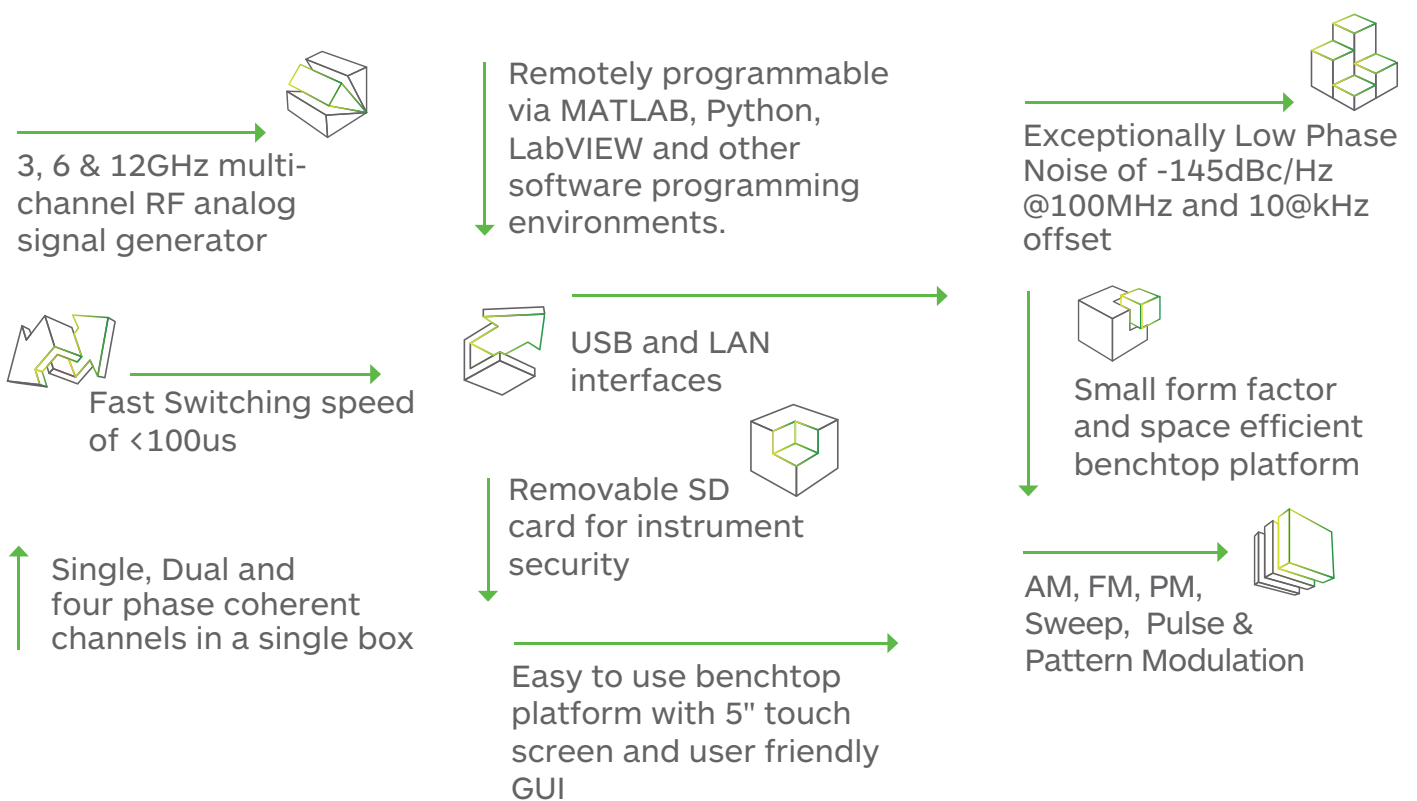



LUCID SERIES  
THINK RF THINK LUCID

## Signal Integrity and Purity

One of the most important requirements in today's testing and measurement applications is a high signal quality. With a typical SSB phase noise of -145dBc at 100MHz, and -132dBc at 1GHz, at 10 kHz carrier offset. Lucid delivers one of the best quality signals available on the market today.

## Multiple Ways to Control the Unit and Write Your Code

The Lucid Series has a dedicated software to control the instrument functions, modes and features via a graphical user interface (GUI). It also includes a complete set of drivers, allowing you to write applications in various environments, including LabVIEW, Python, CVI, C++, VB and MATLAB. You may also link the supplied DLL to other Windows-based API's or use low-level SCPI commands to program the instrument, regardless of whether the application is written for Windows, Linux or Macintosh operating systems.

## Modulation Schemes


Signal bursts and chirps have become common need in most aerospace or defense application. With Tabor's Lucid Series, any signal modulation is possible, no matter if "narrow" or "standard" signals are required. On top of its outstanding pulse modulation performance, the Lucid Series is also equipped with many CW interferers, and modulated signals such as AM, FM, PM, Pulse, Pattern and Sweep.

## Multi-channel, phase coherent, benchtop generator

Many test systems and experimental setups require multiple RF channels, either separate or synchronized. The Lucid series benchtop platform offers up to 4, separate or phase coherent, RF outputs in a single 19" 2U box, saving up to 4 times the space compared to available benchtop solutions on the market. You can save both valuable bench/rack space and investment capital without compromising performance.

## Easy to use

The benchtop platform offers a 5" touch screen with user friendly GUI to quickly and easily generate the required signal, while displaying all the critical information. For remote control, the series is equipped with Ethernet and USB interface enabling remote programming from PC.

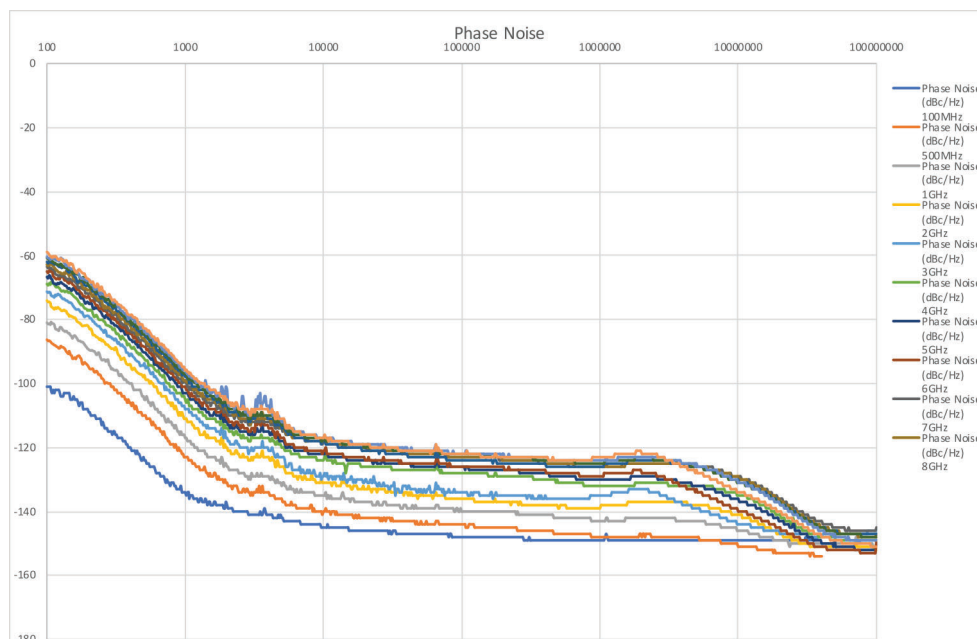

## Specifications

FREQUENCY	
<b>Range:</b>	
LS3081/2/4B:	9 kHz to 3GHz
LS6081/2/4B:	9 kHz to 6GHz
LS1291/2/4B:	9 kHz to 12GHz
<b>Resolution:</b>	0.001 Hz
<b>Phase offset:</b>	0.01 deg
<b>Switching speed:</b>	
Standard:	500 $\mu$ s
FS Option:	100 $\mu$ s

FREQUENCY REFERENCE	
<b>Temp. Stability:</b>	$\pm 25$ ppb max.
<b>Aging:</b>	$\pm 3$ ppm for 20 years
<b>Warm up time:</b>	30 min
<b>Phase stability between channels:</b>	+/-0.08ps, typical over 5 hours at 5GHz

AMPLITUDE <sup>(1)</sup>		
<b>Max output power:</b>		
Settable:	+20 dBm	
Calibrated:	+15 dBm	
<b>Min output power:</b>		
Settable:	-100 dBm	
Calibrated:	-80 dBm	
<b>Resolution:</b>	0.01 dB	
<b>Power Mute:</b>	-95 dBm	
<b>Output Return Loss:</b>	-10 dBm	
<b>Accuracy (dB):</b>	-50dBm to +15dBm	-90dBm to -50dBm
Up to 100MHz:	$\pm 0.3$ (typ.)	$\pm 0.5$ (typ.)
100MHz to 3GHz:	$\pm 0.4$ (typ.)	$\pm 0.6$ (typ.)
3GHz to 9GHz:	$\pm 0.7$ (typ.)	$\pm 0.9$ (typ.)
Above 9GHz:	$\pm 1$ (typ.)	$\pm 1.5$ (typ.)

PHASE NOISE (dBc/Hz)	
Measured @ 10kHz offset	
<b>1 GHz:</b>	-138 (typ.)
<b>2 GHz:</b>	-133 (typ.)
<b>3 GHz:</b>	-130 (typ.)
<b>6 GHz:</b>	-124 (typ.)
<b>12 GHz:</b>	-118 (typ.)

HARMONICS (dBc)	
<b>Up to 100 MHz:</b>	-30 dBc
<b>100 MHz to 12 GHz:</b>	-50 dBc <sup>(2)</sup>

SUB-HARMONICS (dBc)	
<b>6 to 12 GHz:</b>	-55 dBm

NON-HARMONICS (dBc)	
<b>Up to 12 GHz:</b>	-90dBc (typ.) <sup>(3,4)</sup> -60dBc max. <sup>(5)</sup>

MODULATION	
<b>FREQUENCY MODULATION</b>	
<b>Maximum Deviation:</b>	10 MHz
Resolution:	0.1% or 1 Hz (the greater)
<b>Modulation Rate:</b>	1 MHz
Resolution:	1 Hz

AMPLITUDE MODULATION <sup>(6)</sup>	
<b>AM Depth:</b>	
Type:	Linear
Maximum settable:	90%
Resolution:	0.1% of depth
<b>Modulation rate:</b>	DC to 100 kHz

PHASE MODULATION	
<b>Peak Deviation:</b>	360 deg
<b>Modulation Rate:</b>	DC to 100 kHz

PULSE MODULATION (PLS OPTION)	
<b>On/off ratio:</b>	60 dB
<b>Rise/fall time (10%-90%):</b>	15ns (typ.)
<b>Resolution:</b>	6.4ns
<b>Minimum Width:</b>	32ns
<b>Repetition frequency:</b>	DC to 10 MHz

PATTERN MODULATION (PAT OPTION)	
<b>Number of steps:</b>	1 to 2048
<b>Step Repetition:</b>	1 to 65535
<b>On/off time:</b>	32 ns to 20 days

SWEEP	
<b>Range:</b>	Same as freq. range
<b>Modes:</b>	Frequency step, Amplitude step, List
<b>Dwell time:</b>	10 $\mu$ s to 1000 s

<b>Resolution:</b>	1 $\mu$ s
<b>Number of points:</b>	
List:	2 to 4,096
Step:	2 to 65,535
<b>Step change:</b>	Linear
<b>Trigger:</b>	Free run, External, Bus, Timer

INPUTS	
<b>MODULATION INPUT</b>	
<b>Connector Type:</b>	BNC
<b>Input Impedance:</b>	50 $\Omega$
<b>Max. input voltage:</b>	$\pm 1$ V
<b>Input damage level:</b>	$\pm 3.5$ V
<b>PULSE / TRIGGER INPUT</b>	
<b>Connector type:</b>	BNC (per channel)
<b>Input Impedance:</b>	50 $\Omega$
<b>Input voltage:</b>	TTL, CMOS compatible
Threshold:	1.5V
<b>Damage level:</b>	-0.42V or 5.42V

EXTERNAL REFERENCE INPUT	
<b>Connector type:</b>	BNC (per channel)
<b>Input Impedance:</b>	50 $\Omega$
<b>Waveform:</b>	Sine or Square
<b>Frequency:</b>	10/100MHz
<b>Power:</b>	-3 dBm to +10 dBm
<b>Absolute Max. Level:</b>	+15 dBm
<b>Locking Range:</b>	$\pm 2$ ppm

OUTPUTS	
<b>RF OUT</b>	
<b>Impedance:</b>	50 $\Omega$
<b>Connector type:</b>	SMA
<b>Number of outputs:</b>	
LS3081/6081/1291B:	1
LS3082/6082/1292B:	2
LS3084/6084/1294B:	4

REFERENCE OUT	
<b>Impedance:</b>	50 $\Omega$
<b>Connectors type:</b>	2 x BNC
<b>Frequency:</b>	10 MHz or 100 MHz
<b>Shape:</b>	Sine
<b>Power:</b>	3 to 7 dBm

<sup>(1)</sup> Above 100kHz; <sup>(2)</sup> 750MHz to 900MHz -35dBc (typ.); <sup>(3)</sup> -60dBm max. @ 1GHz, 1.5GHz, 2.5GHz and 3GHz; <sup>(4)</sup> -75dBm max. @ -15dBm to +15dBm and f>6GHz; <sup>(5)</sup> Boundary spurs which may appear @ -100MHz to +100MHz offset from CW. <sup>(6)</sup> Specified for >100MHz.

LUCID SERIES  
THINK RF THINK LUCID

## Specifications

GENERAL	
<b>Voltage Range:</b>	90VAC to 264VAC
<b>Frequency Range:</b>	47Hz to 63Hz
<b>Power Consumption:</b>	100W
<b>Display Type:</b>	5", TFT capacitive touch screen
<b>Interface:</b>	
Host:	2 x front panel USB type A 1 x rear panel USB type A
Device: USB: LAN:	1 x rear panel USB type B 1 x rear panel 1000/100/10 BASE-T
<b>Storage:</b>	Removable SD card
<b>Dimensions (W x H x D):</b>	
Without feet	315 X 88 x 425 mm
With feet	315 X 102 x 425 mm
<b>Weight:</b>	
Without Package:	6.0 kg
Shipping Weight:	6.5 kg
<b>Temperature:</b>	
Operating:	0°C to +40°C
Storage:	-40°C to +70°C
<b>Warm up time:</b>	15 minutes
<b>Humidity:</b>	85% RH, non-condensing
<b>Safety:</b>	CE Marked, EC61010-1:2010
<b>EMC:</b>	IEC 61326-1:2013
<b>Calibration:</b>	2 years
<b>Warranty:</b>	3 year standard

ORDERING INFORMATION	
MODEL	DESCRIPTION
LS3081B	3GHz Single Channel RF Analog Signal Generator
LS3082B	3GHz Dual Channel RF Analog Signal Generator
LS3084B	3GHz Four Channel RF Analog Signal Generator
LS6081B:	6GHz Single Channel RF Analog Signal Generator
LS6082B	6GHz Dual Channel RF Analog Signal Generator
LS6084B	6GHz Four Channel RF Analog Signal Generator
LS1291B	12GHz Single Channel RF Analog Signal Generator
LS1292B	12GHz Dual Channel RF Analog Signal Generator
LS1294B	12GHz Four Channel RF Analog Signal Generator
OPTIONS	
PLS	Pulse Modulation
PAT	Pattern Modulation
ELP	Extended Low Power (-150dBc)
EPR	Extended Power Range (-130dBc to +27dB)
FS	Fast Switching
EMU	Emulator pack for Keysight, R&S, Anapico & Holzworth
W-Rack	Rack mount kit

All rights reserved to Tabor Electronics Ltd. Tabor makes no representations nor warranties with respect to the accuracy or completeness of the contents and reserves the right to make changes at any time without notice. Ver\_2.5

For more information contact us at: [info@taborelec.com](mailto:info@taborelec.com) | [www.taborelec.com](http://www.taborelec.com)

